


1.0 mm Round Conductor Flat Cable

28 AWG Stranded, PVC

3625 Series

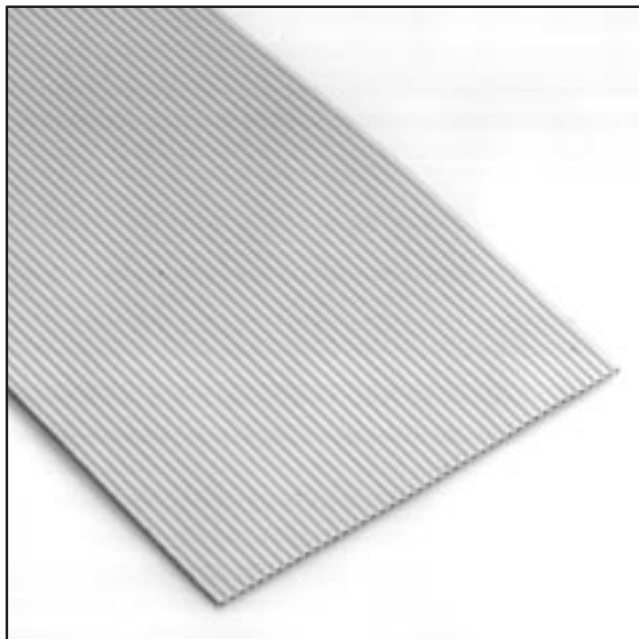

164

IMPORTANT NOTICE TO PURCHASER

ALL STATEMENTS, TECHNICAL INFORMATION AND RECOMMENDATIONS CONTAINED HEREIN ARE BASED ON TESTS WE BELIEVE TO BE RELIABLE, BUT THE ACCURACY OR COMPLETENESS THEREOF IS NOT GUARANTEED, AND THE FOLLOWING IS MADE IN LIEU OF ALL WARRANTIES, EXPRESSED OR IMPLIED:

SELLER'S AND MANUFACTURER'S ONLY OBLIGATION SHALL BE TO REPLACE SUCH QUANTITY OF THE PRODUCT PROVED TO BE DEFECTIVE. NEITHER SELLER NOR MANUFACTURER SHALL BE LIABLE FOR ANY INJURY, LOSS OR DAMAGE, DIRECT OR CONSEQUENTIAL, ARISING OUT OF THE USE OF OR THE INABILITY TO USE THE PRODUCT. BEFORE USING, USER SHALL DETERMINE THE SUITABILITY OF THE PRODUCT FOR HIS INTENDED USE, AND USER ASSUMES ALL RISK AND LIABILITY WHATSOEVER IN CONNECTION THEREWITH. NO STATEMENT OR RECOMMENDATION NOT CONTAINED HEREIN SHALL HAVE ANY FORCE OR EFFECT UNLESS IN AN AGREEMENT SIGNED BY OFFICERS OR SELLER AND MANUFACTURER.

Date Issued: October 17, 1997

TS-0452-07
Sheet 1 of 2

Physical

Insulation

Material: Polyvinyl Chloride (PVC)
Color: Gray

Marking

Standard: None

Canadian Option:  AWM 2651 105C 300V VW1 3M NU  AWM IA 105C 300V FT1
EU <50V

Conductors: 28 AWG 7 x 36 [7 x 0.127] Tinned Stranded Copper

Electrical

Voltage Rating:	USA: 300V	Canada: 300V	EU: <50V
Insulation Resistance:	>1 x 10 ¹⁰ Ω /10ft [3m]		
	Unbalanced	Balanced	
Characteristic Impedance:	92 Ω	146 Ω	
Capacitance:	54.5 pF/m (16.6 pF/ft)	32.2 pF/m (9.8 pF/ft)	
Inductance:	0.46 μH/m (0.14 μH/ft)	0.69 μH/m (0.21 μH/ft)	
Propagation Delay:	4.86 ns/m (1.48 ns/ft)	4.69 ns/m (1.43 ns/ft)	
Velocity of Propagation:	69%	71%	

Note: Unbalanced is measured between ground-signal-ground conductors. Balanced is measured between signal conductors within a pair.

Environmental

Temperature Rating: -20° C to +105° C
Flammability Rating: USA: VW-1 Canada: FT1

UL File No.: E42769, Style No.: 2651

3M Electronic Products Division

6801 River Place Blvd.
Austin, TX 78726-9000


For technical, sales or ordering information call
800-225-5373

1.0 mm Round Conductor Flat Cable

28 AWG Stranded, PVC

3625 Series

Number of Conductors	3M Part Number	Dimension A	Dimension B
08	3625/08	8.00 ± 0.20 [.315]	7.00 ± 0.18 [.276]
10	3625/10	10.00 ± 0.20 [.394]	9.00 ± 0.18 [.354]
12	3625/12	12.00 ± 0.20 [.472]	11.00 ± 0.18 [.433]
14	3625/14	14.00 ± 0.20 [.551]	13.00 ± 0.18 [.512]
16	3625/16	16.00 ± 0.22 [.630]	15.00 ± 0.20 [.591]
18	3625/18	18.00 ± 0.22 [.709]	17.00 ± 0.20 [.669]
20	3625/20	20.00 ± 0.22 [.787]	19.00 ± 0.20 [.748]
22	3625/22	22.00 ± 0.22 [.866]	21.00 ± 0.20 [.827]
24	3625/24	24.00 ± 0.22 [.945]	23.00 ± 0.20 [.906]
26	3625/26	26.00 ± 0.22 [1.024]	25.00 ± 0.20 [.984]
28	3625/28	28.00 ± 0.22 [1.102]	27.00 ± 0.20 [1.063]
30	3625/30	30.00 ± 0.25 [1.181]	29.00 ± 0.23 [1.142]
32	3625/32	32.00 ± 0.25 [1.260]	31.00 ± 0.23 [1.220]
34	3625/34	34.00 ± 0.25 [1.339]	33.00 ± 0.23 [1.299]
36	3625/36	36.00 ± 0.25 [1.417]	35.00 ± 0.23 [1.378]
38	3625/38	38.00 ± 0.25 [1.496]	37.00 ± 0.23 [1.457]
40	3625/40	40.00 ± 0.25 [1.575]	39.00 ± 0.23 [1.535]
42	3625/42	42.00 ± 0.25 [1.654]	41.00 ± 0.23 [1.614]
44	3625/44	44.00 ± 0.25 [1.732]	43.00 ± 0.23 [1.693]
46	3625/46	46.00 ± 0.25 [1.811]	45.00 ± 0.23 [1.772]
48	3625/48	48.00 ± 0.25 [1.890]	47.00 ± 0.23 [1.850]
50	3625/50	50.00 ± 0.25 [1.969]	49.00 ± 0.23 [1.929]

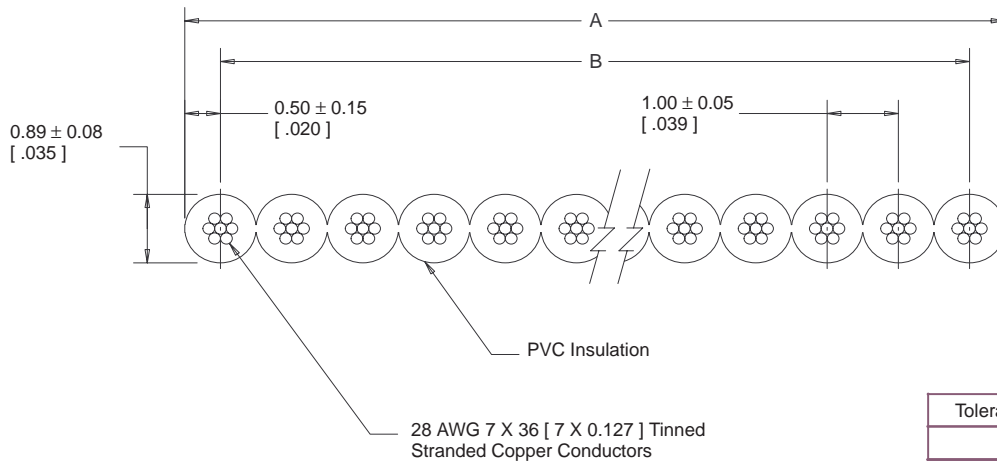


Tolerance Unless Noted			
	.0	.00	.000
mm	±.3	±.13	

Note: Red marking on one edge of the cable designates wire #1.

[] Dimensions for Reference only

Ordering Information

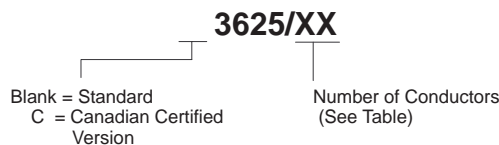

Note: Available in 30 m/roll and 100 m/roll, please specify when ordering.

TS-0452-07
Sheet 2 of 2

3M Electronic Products Division

6801 River Place Blvd.
Austin, TX 78726-9000

For technical, sales or ordering information call
800-225-5373